



VÁLVULAS

Filtro "Y" Ranurado UL

Cuerpo y Tapa: ASTM A536

Tornillos: Gr. 8.8

Malla: Ac. Inoxidable AISI 304

Tapón: Acero al Carbono Zincado


Sello Tapón: EPDM

O 'Ring: EPDM

Torn. Prueba: ASTM B16



Información Técnica

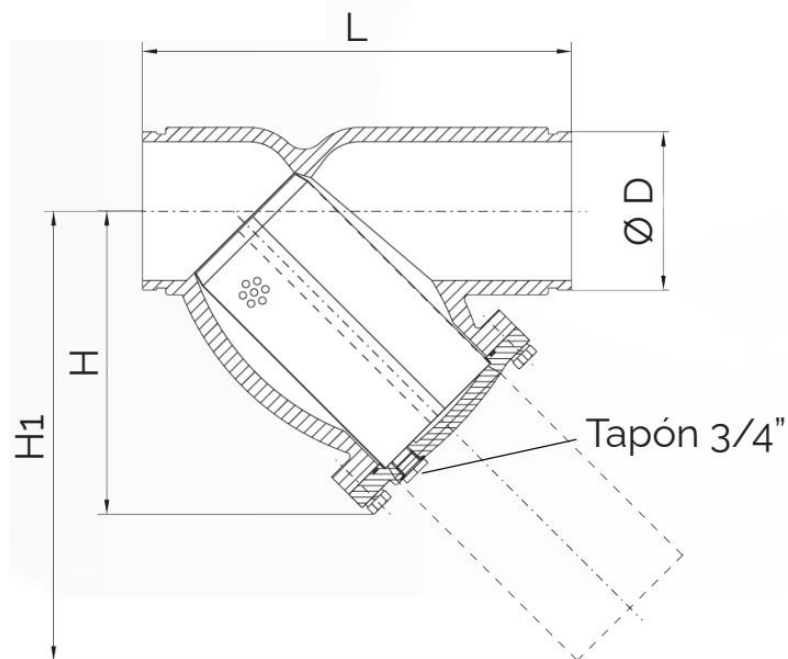



VÁLVULAS

Dimensiones									
Diámetro	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
Dn	50	65	80	100	125	150	200	250	300
L	230	254	272.4	308	398	472	550	654	762
H	130	158	175	202	290	334	391	460	590
H1	195	240	270	320	425	495	570	700	840
D	60.3	73	88.9	114.3	139.7	165.1	219	273	323.9

Condiciones de Trabajo según normas ASME B 16.34	
Fluido	Agua / Aceite / Vapor
Conexión	ASME B16.1
Presión Máxima de trabajo:	20 Bar
Temperatura de trabajo:	0°C / 200°C

CURVA PRESION TEMPERATURA

