



VÁLVULAS

Válvula Esclusa. Fundición Gris. Vástago Ascendente S125/150


Cuerpo: Fundición Gris ASTM A126

Internos: Bronce

Valvula esclusa, bonete abulonado, vástago ascendente, apta para reempaquetar bajo presion, asientos renovables



Información Técnica

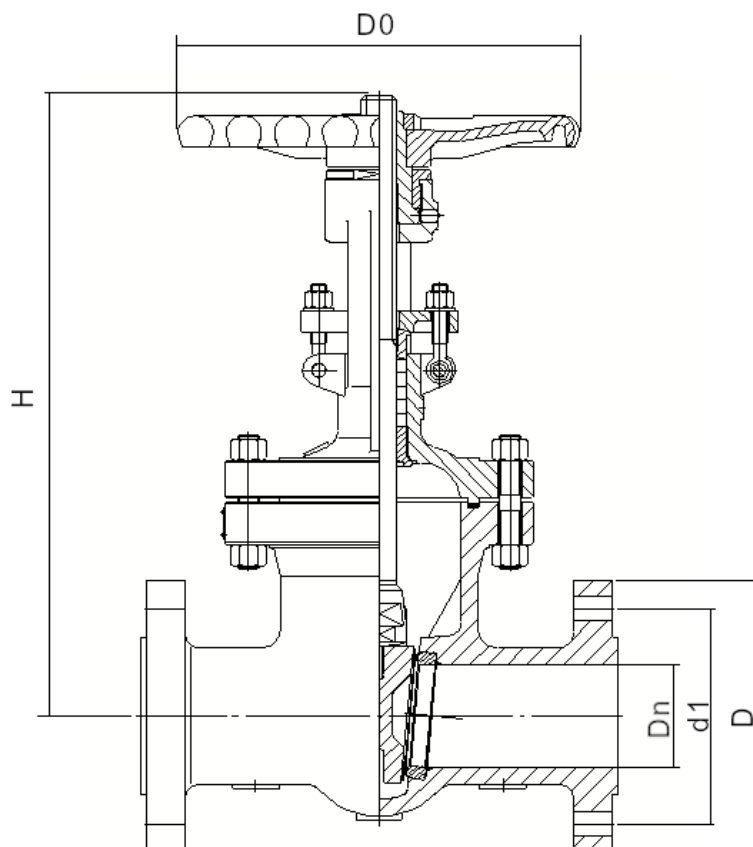

Dimensiones										
Diámetro	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"
Dn	50	65	80	100	125	150	200	250	300	350
L	177.8	190	203.2	228.6	254	266.7	292.1	330.2	355.6	381
D0	178	178	204	254	305	305	356	407	457	508
H abierta	452	502	505	635	784	820	1055	1275	1480	1613
d1	121	140	152	191	216	241	299	362	432	476
D	152.4	177.8	190.5	228.6	254	279.4	342.9	406.4	482.6	533.4

Condiciones de Trabajo según normas ASME B 16.34	
Fluido	Agua / Aceite
Conexión	Brida ANSI Clase 150
Presión Máxima de trabajo:	10 Bar
Temperatura de trabajo:	-10°C / 80°C



VÁLVULAS



CURVA PRESION TEMPERATURA

