



VÁLVULAS

Válvula Esclusa. Vástago Fijo. Bridada con Cierre en Goma.

Cuerpo, Tapa y Bonete: Hierro Dúctil

Volante: Hierro Dúctil

Cuña: Hierro Dúctil + EPDM

Tornillo: AISI 410


Tuerca de Tornillo: Hierro Dúctil / Latón

Junta: EPDM

Brida: Norma DIN 3202 PN16 / Sin perforar



Información Técnica

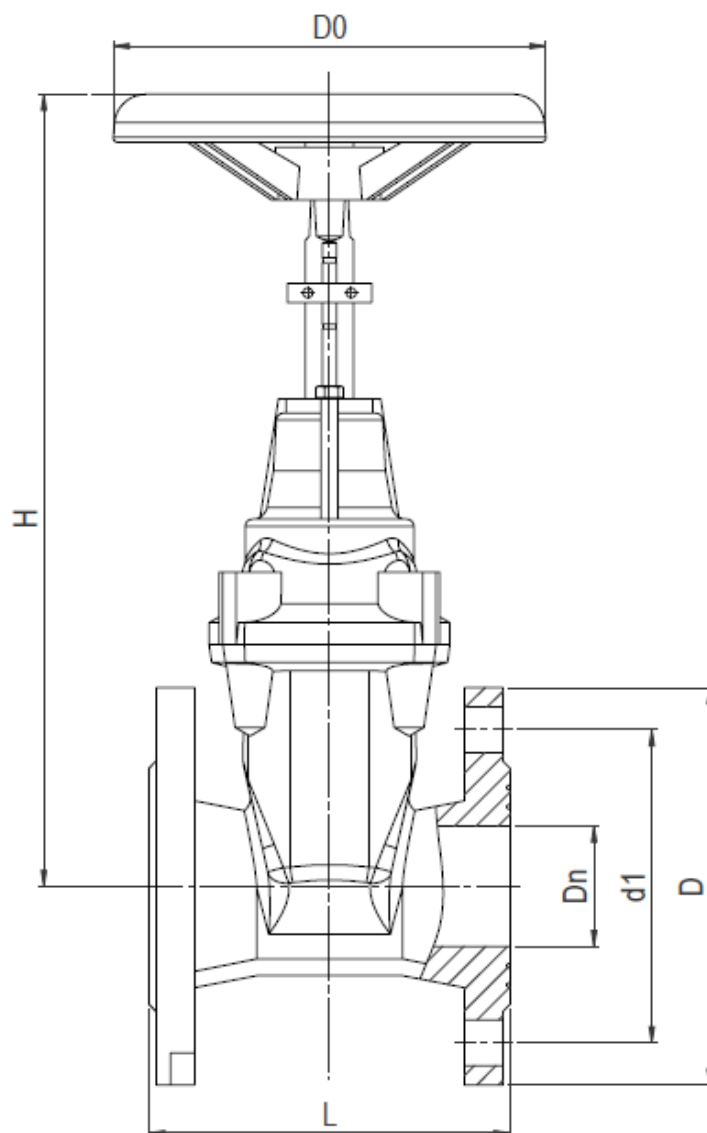

Dimensiones								
Dn	50	65	80	100	125	150	200	250
L	150	170	180	190	200	210	230	250
H	227	230	270	310	365	406	512	580
D	165	185	200	220	250	285	340	407
d1	125	145	160	180	210	240	295	350
D0	160	160	180	200	250	250	300	350



Condiciones de Trabajo	
Fluido	Agua
Presión Máxima de trabajo PN 10 / PN 16:	10 / 16 Bar
Temperatura de trabajo:	$\leq 80^{\circ}\text{C}$
Conexión	Bridada ANSI B 16.5 S150

CURVA PRESION TEMPERATURA

