



VÁLVULAS


Válvula de Retención Vertical de Pie con Canasto Filtrante.

Cuerpo: Fundición Gris ASTM A126.
Acero al Carbono ASTM WCB 216.

Tipo de montaje: Bronce ASTM B145 / Goma.



Información Técnica

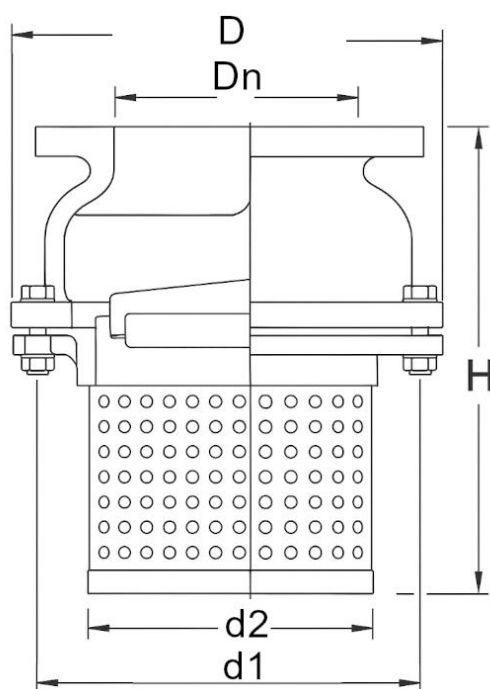



Dimensiones										
Medida	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"
Dn (Ø nominal)	50	62	75	100	125	150	200	250	300	350
H	200	220	254	272	302	422	457	501	647	680
D	152	178	190	229	254	279	343	406	483	533
d1	120	140	152	190	216	241	298	362	432	477
d2	190	200	212	260	290	323	396	525	550	600
Cant. Agujeros	4	4	4	8	8	8	8	12	12	12

Condiciones de Trabajo	
Fluido	Agua / Aceite
Presión Máxima de trabajo:	10 Bar
Temperatura de trabajo:	-5° / 80°C
Conexión	Bridada

CURVA PRESION TEMPERATURA

