




VÁLVULAS

Válvula Retención a Bola

1. Brida: Perforada según EN1092
2. Junta de Tapa: NBR
3. Cuerpo y Tapa: Hierro Dúctil
4. Bola: WCB/hierro + EPDM
5. Tornillo y Tuerca: C45E/1045



Información Técnica

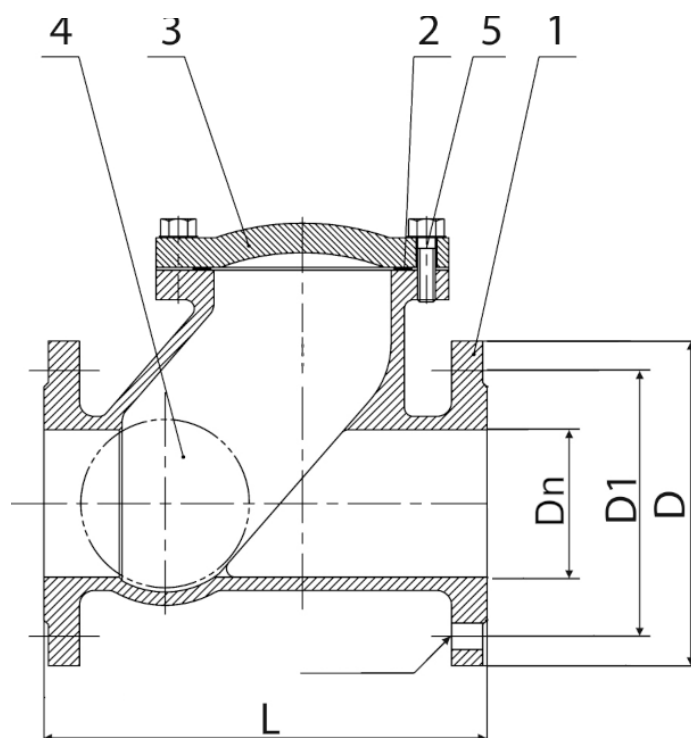



VÁLVULAS

Dimensiones PN 10										
Dn (Ø nominal)	40	50	65	80	100	125	150	200	250	300
D	150	165	185	200	220	250	285	340	395	445
D1	110	125	145	160	180	210	240	295	350	400
L	180	200	240	260	300	350	400	500	600	700
Dimensiones PN 16										
Dn (Ø nominal)	40	50	65	80	100	125	150	200	250	300
D	150	165	185	200	220	250	285	340	405	460
D1	110	125	145	160	180	210	240	295	355	410
L	180	200	240	260	300	350	400	500	600	700

Condiciones de Trabajo	
Fluido	Agua / Aceite
Presión Máxima de trabajo PN10:	10 Bar
Temperatura de trabajo PN10:	0°C / 80°C
Presión Máxima de trabajo PN16:	16 Bar
Temperatura de trabajo PN16:	0°C / 80°C
Conexión	Bridada Según EN 1092

CURVA PRESION TEMPERATURA

