



VÁLVULAS

Válvula de Retención a Clapeta en Fundición Gris. Bridada S125/150


Cuerpo: Fundición Gris ASTM A126

Tapa: Fundición Gris ASTM A126

Tipo de Montaje: Bronce ASTM B216 / Goma



Información Técnica

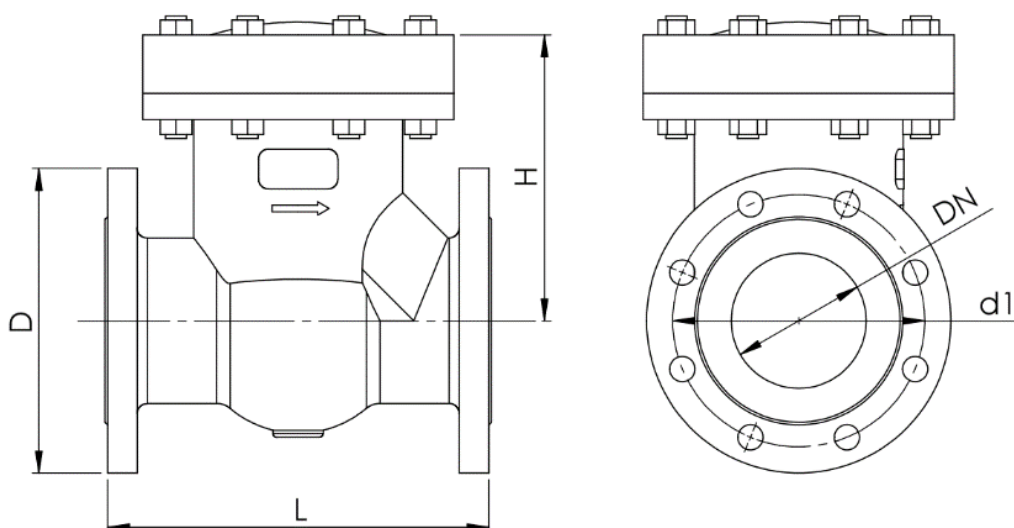



VÁLVULAS

Dimensiones									
Diámetro	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
H	115	128	145	163	190	207	253	302	336
D	152.4	177.8	191	230	254	279	343	406	482
d1	120.7	139.7	152.4	190.5	215.9	241.3	298.5	361.9	431.8
L	203	220	241	292	330	356	495	622	699
Dn (Ø nominal)	50	62	75	100	125	150	200	250	300

Condiciones de Trabajo según normas ASME B 16.34	
Fluido	Agua / Aceite / Vapor / Aire
Presión Máxima de trabajo:	10 Bar
Temperatura de trabajo:	-5°C / 80°C
Conexión	Bridada ANSI B 16.5 S150

CURVA PRESION TEMPERATURA

