



VÁLVULAS

Válvula Globo Fundición Gris. Bridada


Cuerpo: Fundición Gris ASTM A126

Vástago: Bronce o Latón

Tipo de Montaje: Bronce ASTM B145



Información Técnica

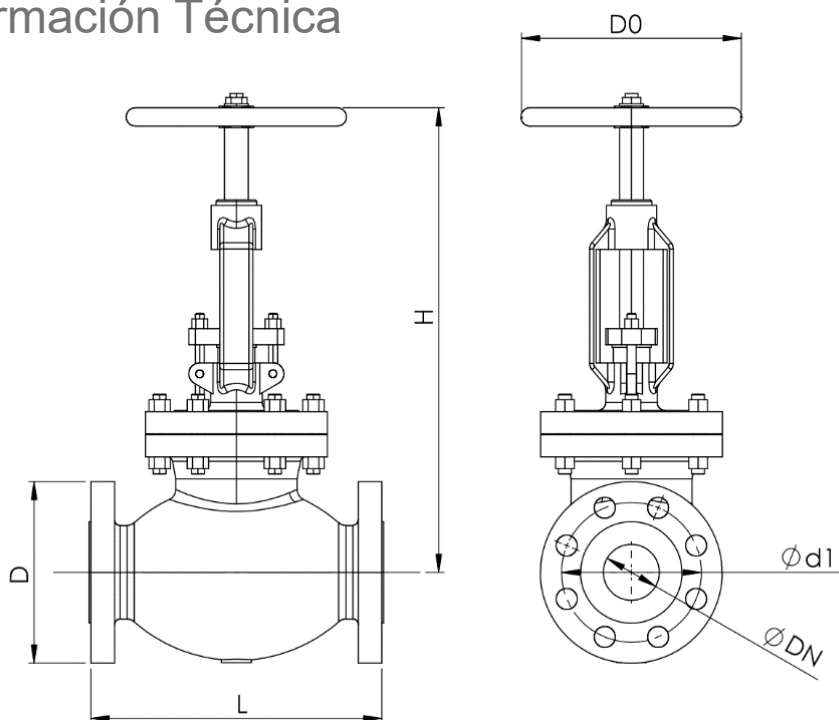



VÁLVULAS

Dimensiones										
Diámetro	2"	2 ½"	3"	4"	5"	6"	8"	10"	12"	14"
H	329	354	386	432	478	513	643	668	830	872
D	152	177.8	191	2330	254	279	343	406	482	533
D0	203	203	203	254	305	356	406	457	610	657
L	145	165	180	198	206	215	235	253	275	290
Dn (Ø nominal)	50	65	80	100	125	150	200	250	300	350
d1	120.6	139.7	152.4	190.5	215.9	241.3	298.4	361.9	431.8	476.2

Condiciones de Trabajo según normas ASME B 16.34	
Fluido	Agua / Aceite / Aire
Presión Máxima de trabajo:	10 Bar
Temperatura de trabajo:	-5°C / 80°C
Conexión	Bridada ANSI B 16.5 S150

CURVA PRESION TEMPERATURA

