


BRIDA LAP JOIN SERIE 150

Acero Forjado A105
SEGÚN NORMAS ANSI B16.5

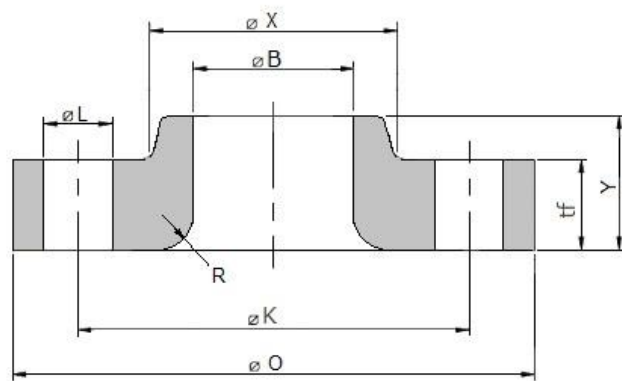

Dimensiones										
Ø Nominal Tubería (**)	Ø Exterior O (*)	Mínimo Espesor tf (*)	Ø Hub X (*)	Longitud Con Hub Y (*)	Ø Mínimo Agujero B (*)	Radio R (*)	Agujeros			Ø Tornillo (**)
							ØK Centro (*)	Nro. Agujero	Agujero Ø L (**)	
1/2"	90	11.2	30	16	22.9	3	60.3	4	5/8"	1/2"
3/4"	100	12.7	38	16	28.2	3	69.9	4	5/8"	1/2"
1"	110	14.3	49	17	34.9	3	79.4	4	5/8"	1/2"
1 1/4"	115	15.9	59	21	43.7	5	88.9	4	5/8"	1/2"
1 1/2"	125	17.5	65	22	50	6	98.4	4	5/8"	1/2"
2"	150	19.1	78	25	62.5	8	120.7	4	3/4"	5/8"
2 1/2"	180	22.3	90	29	75.4	8	139.7	4	3/4"	5/8"
3"	190	23.9	108	30	91.4	10	152.4	4	3/4"	5/8"
3 1/2"	215	23.9	122	32	104.1	10	177.8	8	3/4"	5/8"
4"	230	23.9	135	33	116.8	11	190.5	8	3/4"	5/8"
5"	255	23.9	164	36	144.4	11	215.9	8	7/8"	3/4"
6"	280	25.4	192	40	171.4	13	241.3	8	7/8"	3/4"
8"	345	28.6	246	44	222.2	13	298.5	8	7/8"	3/4"
10"	405	30.2	305	49	277.4	13	362	12	1"	7/8"
12"	485	31.8	365	56	328.2	13	431.8	12	1"	7/8"
14"	535	35	400	79	360.2	13	476.3	12	1 1/8"	1"
16"	595	36.6	457	87	411.2	13	539.8	16	1 1/8"	1"
18"	635	39.7	505	97	462.3	13	577.9	16	1 1/4"	1 1/8"
20"	700	42.9	559	103	514.4	13	635	20	1 1/4"	1 1/8"
24"	815	47.7	663	111	616	13	749.3	20	1 3/8"	1 1/4"

(*) Dimensiones en milímetros (**) Dimensiones en pulgadas