


BRIDA ROSCADA SERIE 150 BSPT

Acero Forjado A105
SEGÚN NORMAS ANSI B16.5

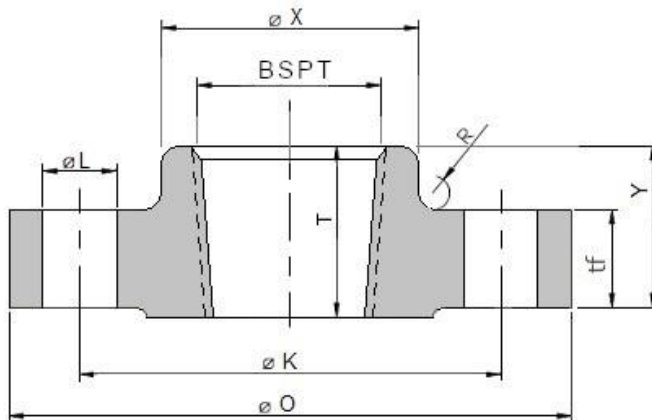

Dimensiones										
Ø Nominal Tubería (**)	Ø Exterior O (*)	Mínimo Espesor tf (*)	Ø Hub X (*)	Longitud Con Hub Y (*)	Longitud Mínima Roscada T (*)	Ø Cara Elevada R (*)	Agujeros			Ø Tornillo (**)
							ØK Centro (*)	Nro. Agujero	Agujero Ø L (**)	
1/2"	90	9.6	30	14	16	34.9	60.3	4	5/8"	1/2"
3/4"	100	11.2	38	14	16	42.9	69.9	4	5/8"	1/2"
1"	110	12.7	49	16	17	50.8	79.4	4	5/8"	1/2"
1 1/4"	115	14.3	59	19	21	63.5	88.9	4	5/8"	1/2"
1 1/2"	125	15.9	65	21	22	73	98.4	4	5/8"	1/2"
2"	150	17.5	78	24	25	92.1	120.7	4	3/4"	5/8"
2 1/2"	180	20.7	90	27	29	104.8	139.7	4	3/4"	5/8"
3"	190	22.3	108	29	30	127	152.4	4	3/4"	5/8"
3 1/2"	215	22.3	122	30	32	139.7	177.8	8	3/4"	5/8"
4"	230	22.3	135	32	33	157.2	190.5	8	3/4"	5/8"
5"	255	22.3	164	35	36	185.7	215.9	8	7/8"	3/4"
6"	280	23.9	192	38	40	215.9	241.3	8	7/8"	3/4"
8"	345	27	246	43	44	269.9	298.5	8	7/8"	3/4"
10"	405	28.6	305	48	49	323.8	362	12	1"	7/8"
12"	485	30.2	365	54	56	381	431.8	12	1"	7/8"
14"	535	33.4	400	56	57	412.8	476.3	12	1 1/8"	1"
16"	595	35	457	62	64	469.9	539.8	16	1 1/8"	1"
18"	635	38.1	505	67	68	533.4	577.9	16	1 1/4"	1 1/8"
20"	700	41.3	559	71	73	584.2	635	20	1 1/4"	1 1/8"
24"	815	46.1	663	81	83	692.2	749.3	20	1 3/8"	1 1/4"

(*) Dimensiones en milímetros (**) Dimensiones en pulgadas